




Certified Product

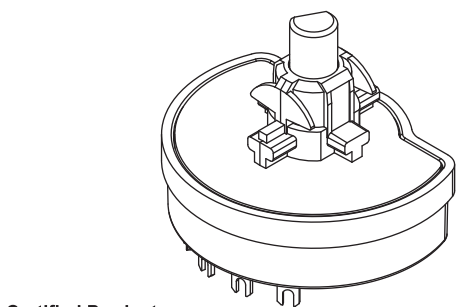

51.000 SERIES

ROTARY SWITCHES

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS: 3,5(3,5)A in 127V~ and 2(2)A in 250V~.

CONTACT RESISTANCE: maximum of 20 milliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000V(RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: from 0°C to 85°C





REFERENCES

With momentary

Reference	Initial position	Momentary position	Quantity of ON positions	MOMENTARY
51.015	OFF	(1P)	5	

() Momentary

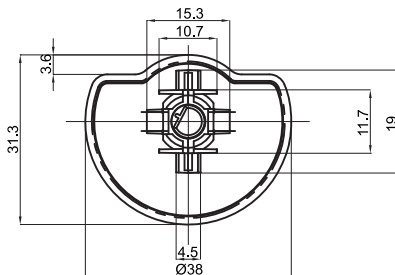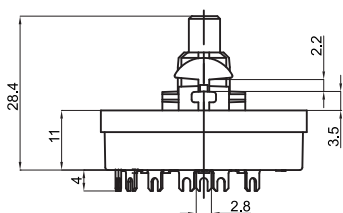


ACTUADOR

A1




FIXATION

B2 - LOCK



CUT FOR FIT



NOTE:
Option B2 requires a panel with thickness of 2.1mm.

TERMINALS

S1 - 2.8X0.5



CONTACT

Sy

3,5(3,5)A in 127V~
2(2)A in 250V~

SELECTION GUIDE



Reference



actuador

A1



fixation

B2



terminal

S1



contact

Sy